

OneRemote DabFmBlue6

Advanced Tuner for Bang & Olufsen Systems Handling

DAB/DAB+ – FM - Bluetooth receiver.

User Guide

Control with Bang & Olufsen Remotes



DAILY OPERATION WITH BANG & OLUFSEN REMOTES

THE LAMP ON THE FRONT OF DabFmBlue6

RED: The B&O Remote control controls **OTHER** devices, **NOT** DabFmBlue6.

GREEN: The B&O remote controls **DabFmBlue6** receiver. *1



Press twice to select. *Mouse double-click.*



Select Source, DAB+, FM, Bluetooth etc.

BACK to previous screen.



Show favorite Channel List.

Save the current playing radio channel as a Favorite.

Press and wait 2 second, then select FAV number.



Setup menu.



Select a preset channel.



Stand by. Powers off both the B&O radio.
and the DabFmBlue6 receiver.



Set Bass and Treble.



Show info about program og antenna quality.
Press repeatedly.



Maneuvering in menus **or** volume level.

NOTE: Volume level **MUST always** be left at maximum.

*1 Enable control of **DabFmBlue6** with the Bang & Olufsen remote control. When enabled the lamp will turn **GREEN**. If not changed at installation use the Source key **ATAPE** or **AMEM** .

CONTENT

DAILY OPERATION WITH BANG & OLUFSEN REMOTES	2
GETTING STARTED -QUICK GUIDE.....	4
DAILY USE WITH THE FACTORY SETTINGS	5
DAB+ RADIO RECEPTION	6
Presets	6
Other control options during DAB handling:	6
FM RADIO RECEPTION	7
Presets	7
Other control options during FM handling:	7
BLUETOOTH RECEPTION	8
Other control options during Bluetooth handling:	8
*1 Pairing a Bluetooth device to DabFmBlue6	8
OLDER BANG & OLUFSEN REMOTES.....	9
Daily Operation with Older Bang & Olufsen Remotes	9

GETTING STARTED -QUICK GUIDE

- This User Manual explains the daily use of the tuner only.
- The Installation Manual explains the setup and connection to the B&O system.

The DabFmBlue6 adaptor is for use with B&O radios or TVs, adding DAB+, FM and streaming from Bluetooth devices. It becomes a part of the remotely controlled Bang & Olufsen system.

Complete control is obtained with a Bang & Olufsen remote control terminal.


- DabFmBlue6 is a beo-compatible tuner.
- DabFmBlue6 may be controlled by any Bang & Olufsen system remote terminals from 1988 and on.

DabFmBlue6 may be connected to any Bang & Olufsen system and controlled directly by Bang & Olufsen remotes.

When switching on the DabFmBlue6 with a Bang & Olufsen remote the Bang & Olufsen system is switched on too and the input with the DabFmBlue6 is automatically selected.

DabFmBlue6 is connected to the system input that is selected by pressing **AMEM** or **ATAPE** on the Bang & Olufsen remote.

If the Bang & Olufsen system has no **AMEM** or **ATAPE** operated input available, the DabFmBlue6 needs to be connected to a different input socket and reprogramming of the DabFmBlue6 is required accordingly. This has been chosen during the Installation. Refer to the Installation Manual.

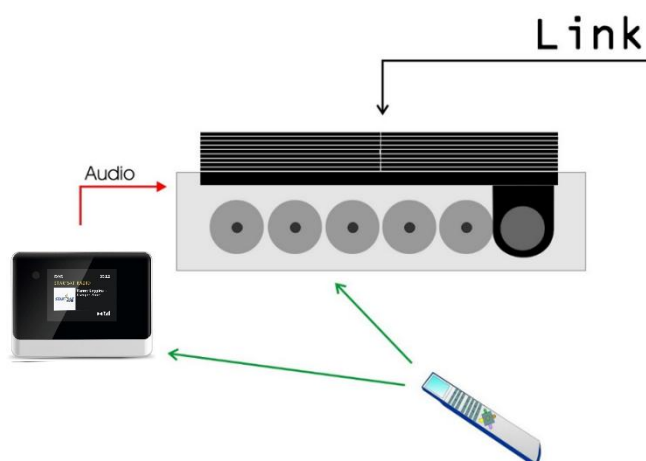

DAILY USE WITH THE FACTORY SETTINGS

- Press **AMEM** to Power on both the B&O radio and DabFmBlue6. Lamp turns **GREEN**.
- Press **0** – **9** to select one of your preset favorite stations.
- Press **●** to Power off both the B&O radio and DabFmBlue6. Lamp turns **RED**.

**1*

Note that during installation; another source than **AMEM** may have been chosen.

The Favorite program list can easily be changed during daily use.

Enter favorite channels as presets selectable by pressing single digits on the Bang & Olufsen remote control.

A total of 30 presets is available each for FM, DAB+ and Internet Radio each.

DAB+ RADIO RECEPTION

- Press **ATAPE** or **AMEM** to power on DabFmBlue6 and the B&O radio. *1
- Press  repeatedly until **DAB** is shown in the display.

PRESETS

- To select a preset **DAB+** channel, simply press a digit **0** – **9** .
- Press  to get a list of the preset channels.

The preset number and the **quality** of the antenna signal are displayed at the very bottom of the display.

OTHER CONTROL OPTIONS DURING DAB HANDLING:

-   Save the actual channel as a preset.
-  **Back** to return to a previous menu.
-  Displays info about the program listened to and the quality of the antenna.
-  **4** Info
-  **8** Rescan for stations. More advanced scan options are available on the Menu.

*1 Note that during installation; another source than **AMEM** may have been chosen.

FM RADIO RECEPTION

- Press **ATAPE** or **AMEM** To power on DabFmBlue6 and the B&O radio. *1
- Press  repeatedly until **FM** is shown in the upper left corner of the display.

PRESETS

- To select a preset **FM** program, simply press a digit **0** – **9** .
- Press  to get a list of the preset channels.

The preset number and the signal quality are displayed at the very bottom of the display.

OTHER CONTROL OPTIONS DURING FM HANDLING:

-   Save the actual channel as a preset.
-  **Back** to return to a previous menu.
-  Displays info about the program listened to and the quality of the antenna.
-  **4** Info.
-  **8** Rescan for stations. More advanced scan options are available on the Menu.

*1 Note that during installation; another source than **AMEM** may have been chosen.

BLUETOOTH RECEPTION

*Selecting Bluetooth makes it possible to play music from any paired smartphone, tablet, or other device, via DabFmBlue6 and the Bang & Olufsen system. *1*

- Press **ATAPE** or **AMEM** to power on DabFmBlue6 and the B&O radio. *2
- Press  repeatedly until **Bluetooth** is shown in the display.

In the Bluetooth mode all control of the music is handled directly on the transmitting smartphone, tablet or any other Bluetooth connected device.

Playback status and the signal quality are displayed at the very bottom of the display.

OTHER CONTROL OPTIONS DURING BLUETOOTH HANDLING:



4

Info

*1 PAIRING A BLUETOOTH DEVICE TO DABFMBLUE6

For a smartphone, tablet or any other bluetooth device to be able to send music to DabFmBlue6, it must be paired with DabFmBlue6.

Pairing is only needed initially, as DabFmBlue6 will remember the bluetooth device.

To pair a bluetooth transmitter with DabFmBlue6:

1. Select the bluetooth mode, as described above.
2. Go to the Setup Menu on the **transmitting** device and look for the bluetooth menu.
3. Shortly after selecting bluetooth, the DabFmBlue6 will show up in the menu as **DIGITRADIO**. Select this and music played on the device can be listened to via the Bang & Olufsen system.

*1 Note that during installation; another source than **AMEM** may have been chosen.

OLDER BANG & OLUFSEN REMOTES

The DabFmBlue6 tuner may be controlled by all Bang & Olufsen system remotes.

Through the years Bang & Olufsen has marketed various models, where keys have been added or removed. Some keys have just changed names.

As an example, the **PLAY** key has been replaced by the **GO** key.

If the remote does **NOT** have a **GO** key or a small joystick, control the DabFmBlue6 tuner in accordance with below tables.

DAILY OPERATION WITH OLDER BANG & OLUFSEN REMOTES

PLAY PLAY	Press twice to select. <i>Mouse double-click.</i>
STOP	Select source; DAB+, FM Radio, Bluetooth etc.
STORE	BACK to previous screen.
GOTO	Show the list with the preset channels.
PLAY GOTO	Save the current radio channel as a Favorite. <i>Press and wait 2 second, then select FAV number.</i>
PLAY 4	Info.
PLAY 7	Set Bass and Treble.
PLAY STORE	Installation Menu.