

OneRemote DabWiFi8

Advanced Tuner for Bang & Olufsen Systems Handling

**DAB/DAB+, FM, Bluetooth receiver,
Internet Radio, Spotify, Podcast**

User Guide

Control with Bang & Olufsen Remotes



DAILY OPERATION WITH BANG & OLUFSEN REMOTES

THE LAMP ON THE FRONT OF DabWiFi8

RED: The B&O Remote control controls **OTHER** devices, **NOT** DabWiFi8.

GREEN: The B&O remote controls **DabWiFi8** receiver. *1



Press twice to select. *Mouse double-clicks.*



Select Source, DAB+, FM, Bluetooth etc.

BACK to previous screen.



Show favorite Channel List.

Save the current playing radio channel as a Favorite.

Press and wait 2 seconds, then select FAV number.



Setup menu.



Select a preset channel.



Stand by. Powers off both the B&O radio.
and the DabWiFi8 receiver.



Set Bass and Treble.



Show info about program og antenna quality.
Press repeatedly.



Maneuvering in menus **or** volume level.

NOTE: Volume level **MUST always** be left at maximum.

*1 Enable control of **DabWiFi8** with the Bang & Olufsen remote control. When enabled the lamp will turn **GREEN**. If not changed at installation use the Source key **ATAPE** or **AMEM** .

CONTENT

DAILY OPERATION WITH BANG & OLUFSEN REMOTES	2
GETTING STARTED -QUICK GUIDE.....	4
DAILY USE WITH THE FACTORY SETTINGS	5
INTERNET RADIO RECEPTION.....	6
Presets	6
Selecting a non-preset Internet Radio station.	6
Other control options during Internet Radio handling:	6
DAB+ RADIO RECEPTION	7
Presets	7
Other control options during DAB handling:	7
FM RADIO RECEPTION	8
Presets	8
Other control options during FM handling:	8
BLUETOOTH RECEPTION	9
Other control options during Bluetooth handling:	9
*1 Pairing a Bluetooth device to DabWiFi8	9
PODCASTS.....	10
Other control options during Podcast handling:.....	10
SPOTIFY.....	11
Other control options during Podcast handling:.....	11
MAIN MENU	12
OLDER BANG & OLUFSEN REMOTES.....	13
Daily Operation with Older Bang & Olufsen Remotes	13

GETTING STARTED -QUICK GUIDE

- This User Manual explains the daily use of DabWiFi8 only.
- Refer to Installation Manual about set-up and connection to the B&O system.

The DabWiFi8 adaptor is for use with B&O radios or TVs, adding DAB+, FM and streaming from Bluetooth devices. It becomes a part of the remotely controlled Bang & Olufsen system.

Complete control is obtained with a Bang & Olufsen remote control terminal.


- DabWiFi8 is a beo-compatible tuner.
- DabWiFi8 may be connected by any Bang & Olufsen system remote terminals from 1988 and on.

DabWiFi8 may be connected to any Bang & Olufsen system and controlled directly by Bang & Olufsen remotes.

When switching on the DabWiFi8 with a Bang & Olufsen remote the Bang & Olufsen system is switched on too and the input with the DabWiFi8 is automatically selected.

DabWiFi8 is connected to the system input that is selected by pressing **AMEM** or **ATAPE** on the Bang & Olufsen remote.

If the Bang & Olufsen system has no **AMEM** or **ATAPE** operated input available, the DabWiFi8 needs to be connected to a different input socket and reprogramming of the DabWiFi8 is required accordingly. This has been chosen during the Installation. Refer to the Installation Manual.

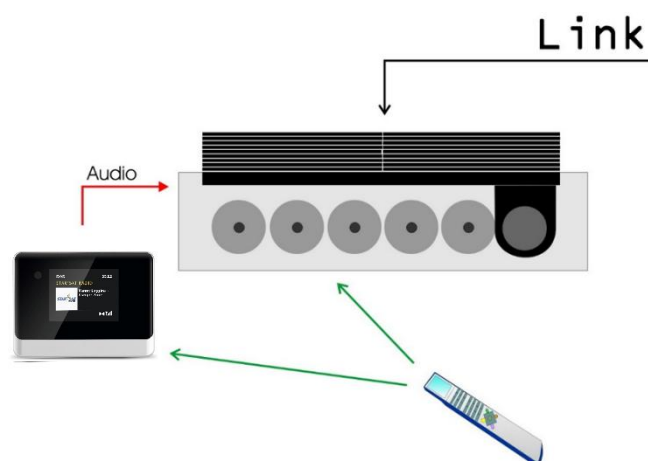

DAILY USE WITH THE FACTORY SETTINGS

- Press **AMEM** to Power on both the B&O radio and DabWiFi8.
Lamp turns **GREEN**.
- Press **0** – **9** to select one of your preset favorite stations.
- Press **●** to Power off both the B&O radio and DabWiFi8.
Lamp turns **RED**.

**1*

Note that during installation; another source than **AMEM** may have been chosen.

The Favorite program list can easily be changed during daily use.

Enter favorite channels as presets selectable by pressing single digits on the Bang & Olufsen remote control.

A total of 30 presets is available each for FM, DAB+ and Internet Radio each.

INTERNET RADIO RECEPTION

- Press **ATAPE** or **AMEM** to power on DabWiFi8 and the B&O radio. *1
- Press  repeatedly until **Internetradio** is shown in the display.

PRESETS

- To select a preset **Internet Radio** channel, simply press a digit **0** – **9** .
- Press  to get to the presets 11 to 30.
- Press  to get a list of the preset channels.

The selected preset number and the quality of the WiFi signal are displayed at the very bottom of the display.

SELECTING A NON-PRESET INTERNET RADIO STATION.

From the play screen, Press  or  to access the Radio Search menu. Here the channels are sorted into subcategories for easier location.

In these listings the  (**BACK**) **must** be used to go back to the previous screen. For ease the  may be used to select an item in the list, but the  **must** be used to back out. The  key works on all menus.

OTHER CONTROL OPTIONS DURING INTERNET RADIO HANDLING:

-   Save the actual channel as a new preset.
-  **Back** to return to the previous menu.
-  **4** Info

*1 The actual B&O system might be set up to use another source than **ATAPE** or **AMEM** .

DAB+ RADIO RECEPTION

- Press **ATAPE** or **AMEM** to power on DabWiFi8 and the B&O radio. *1
- Press  repeatedly until **DAB** is shown in the display.

PRESETS

- To select a preset **DAB+** channel, simply press a digit **0** – **9** .
- Press  to get a list of the preset channels.

The preset number and the **quality** of the antenna signal are displayed at the very bottom of the display.

OTHER CONTROL OPTIONS DURING DAB HANDLING:

-   Save the actual channel as a preset.
-  **Back** to return to the previous menu.
-  Displays info about the program listened to and the quality of the antenna.
-  **4** Info
-  **8** Rescan for stations. More advanced scan options are available on the Menu.

*1 Note that during installation; another source than **AMEM** may have been chosen.

FM RADIO RECEPTION

- Press **ATAPE** or **AMEM** to power on DabWiFi8 and the B&O radio. *1
- Press  repeatedly until **FM** is shown in the upper left corner of the display.

PRESETS

- To select a preset **FM** program, simply press a digit **0** – **9** .
- Press  to get a list of the preset channels.

The preset number and the signal quality are displayed at the very bottom of the display.

OTHER CONTROL OPTIONS DURING FM HANDLING:

-   Save the actual channel as a preset.
-  **Back** to return to the previous menu.
-  Displays info about the program listened to and the quality of the antenna.
-  **4** Info.
-  **8** Rescan for stations. More advanced scan options are available on the Menu.

*1 Note that during installation; another source than **AMEM** may have been chosen.

BLUETOOTH RECEPTION

*Selecting Bluetooth makes it possible to play music from any paired smartphone, tablet, or other device, via DabWiFi8 and the Bang & Olufsen system. *1*

- Press **ATAPE** or **AMEM** to power on DabWiFi8 and the B&O radio. *2
- Press  repeatedly until **Bluetooth** is shown in the display.

In Bluetooth mode all control of the music is handled directly on the transmitting smartphone, tablet or any other Bluetooth connected device.

Playback status and the signal quality are displayed at the very bottom of the display.

OTHER CONTROL OPTIONS DURING BLUETOOTH HANDLING:



4

Info

*1 PAIRING A BLUETOOTH DEVICE TO DABWIFI8

For a smartphone, tablet or any other Bluetooth device to be able to send music to DabWiFi8, it must be paired with DabWiFi8.

Pairing is only needed initially, as DabWiFi8 will remember the Bluetooth device.

To pair a Bluetooth transmitter with DabWiFi8:

1. Select the Bluetooth mode, as described above.
2. Go to the Setup Menu on the **transmitting** device and look for the Bluetooth Menu.
3. Shortly after selecting Bluetooth, DabWiFi8 will show up in the menu as **DIGITRADIO**.
Select this and music played on the device can be listened to via the Bang & Olufsen system.

*1 Note that during installation; another source than **AMEM** may have been chosen.

PODCASTS

- Press **ATAPE** or **AMEM** to power on DabWiFi7 and the B&O radio. *1
- Press  repeatedly until **Podcast** is shown in the display.

The selected preset number and the WiFi signal quality are displayed at the very bottom of the display. A Podcast preset is saved in the Internet Radio preset list.

OTHER CONTROL OPTIONS DURING PODCAST HANDLING:

-   Save the actual channel as a preset.
-  **Back** to return to the previous menu.
-   Info

*1 The actual B&O system might be set up to use another source than **ATAPE** or **AMEM**.

SPOTIFY

- Press **ATAPE** or **AMEM** to power on DabWiFi7 and the B&O radio. *1

From the Spotify app, simply select the **DIGITRADIO 10 IR** (Default name of the DabWiFi8) to play Spotify via the DabWiFi7 and the Bang & Olufsen system. DabWiFi7 will automatically shift to Spotify.

All music selection is controlled directly in the Spotify APP.

Playback status and the quality of the WiFi signal are displayed at the very bottom of the display.

OTHER CONTROL OPTIONS DURING PODCAST HANDLING:

-  **4** Displays info about the program being listened to.
-  Displays info about the program being listened to.

MAIN MENU

MENU give access to the main menu. When chosen various receiver options are available.

Adjustments to the installation menu are only **required** during initial installation, but many adjustments can be made here.

OLDER BANG & OLUFSEN REMOTES

The DabWiFi8 may be controlled by all Bang & Olufsen system remotes.

Through the years Bang & Olufsen has marketed various models, where keys have been added or removed. Some keys have just changed names.

As an example, the **PLAY** key has been replaced by the **GO** key.

If the remote does **NOT** have a **GO** key or a small joystick; control the DabWiFi8 tuner in accordance with the tables below.

DAILY OPERATION WITH OLDER BANG & OLUFSEN REMOTES

PLAY PLAY	Press twice to select. <i>Mouse double-clicks.</i>
STOP	Select source; DAB+, FM Radio, Bluetooth etc.
STORE	BACK to previous screen.
PLAY STORE	Installation Menu.
GOTO	Show the list of the preset channels.
PLAY GOTO	Save the current radio channel as a Favorite. <i>Press and wait 2 seconds, then select FAV number.</i>
PLAY 4	Info.
PLAY 7	Set Bass and Treble.

Use the arrows to maneuver in menus and volume control.
Remember to **always** keep the volume at max.